

MPX-410DMP

Order No. 0202850




Stereo DJ mixer with integrated MP3 player and Bluetooth receiver

Mixer:

- 4 stereo input channels, switchable MP3/phono/line (channel 1), aux/phono/line (channel 2) and aux/mic/line (channels 3-4)
 - Input channels, each with gain control and 2-way tone control
 - 1 DJ microphone channel, adjustable, with 2-way tone control
 - Adjustable headphone output with pre-fader listening (PFL) to the stereo input channels and the master output
 - Crossfader with assignment switches
 - Master output with stereo LED level display
 - Additional outputs booth and record
- MP3 player with Bluetooth receiver, USB interface and SD/MMC card slot:
- Alphanumeric display

- Bluetooth receiver for wireless connection of laptops, smartphones or tablet PCs
- USB storage media can be connected directly (e.g. USB flash drive)
- For SD/MMC cards up to 32 GB (FAT16/FAT32), available at option
- Repeat function
- Blue backlit display

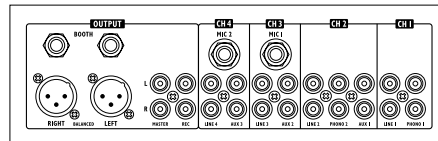

Model	MPX-410DMP
Mic input	1.5 mV, 3 x 6.3 mm jack
Line input	200 mV, 4 x RCA L/R
Phono input	2 mV, 2 x RCA L/R
Aux input	200 mV, 3 x RCA L/R
Master output	1 V, 1 x 3-pole XLR (bal.) 1 x RCA L/R
Record output	400 mV, 1 x RCA L/R
Booth output	1 V, 1 x 6.3 mm jack L/R
Headphones	≥ 8 Ω, 1 x 6.3 mm jack
Bluetooth	yes
Frequency range	20-20,000 Hz
THD	< 0.15%
S/N ratio	> 60 dB, unweighted
Equalizer bass	±15 dB/50 Hz (channels 1-4) ±12 dB/100 Hz (DJ mic)
Equalizer treble	±15 dB/10 kHz (channels 1-4) ±12 dB/7 kHz (DJ mic)
Power supply	~ 230 V/50 Hz/15 VA
Dimensions	482 x 88 x 125 mm, 2 RS
Weight	2.9 kg

MPX-622/SW


Order No. 0202210



6-channel stereo audio mixer, particularly suitable for PA and DJ applications.

- 2 mono microphone channels with talkover switch and 2-way tone control
- 4 stereo input channels, switchable phono/line (channels 1 and 2) or line/line (channels 3 and 4)
- 1 stereo master output
- 1 stereo record output, independent of the master

- 3-way equalizer with centre click for master output and record output
- Pre-fader listening to each stereo input channel and the master output via adjustable stereo headphone output
- Switchable crossfader for crossfading between channels 1-4, any assignment possible
- Stereo LED level display



Model	MPX-622/SW
Mic input	1 mV, 2 x 6.3 mm jack
Line input	150 mV, 5 x RCA L/R
CD input	150 mV, 1 x RCA L/R
Phono input	3 mV, 2 x RCA L/R
Master output	0.775 V/600 Ω, 1 x RCA L/R
Record output	0.775 V/600 Ω, 1 x RCA L/R
Headphones	≥ 8 Ω, 1 x 6.3 mm jack
Frequency range	20-20,000 Hz
THD	0.1%
S/N ratio	65 dB
Equalizer bass	±10 dB/100 Hz
Equalizer midrange	±10 dB/1 kHz
Equalizer treble	±10 dB/10 kHz
Talkover	-15 dB
Power supply	~ 230 V/50 Hz/10 VA
Dimensions	482 x 89 x 95 mm, 2 RS
Weight	2.4 kg

MPX-44/SW

Order No. 0202420




6-channel stereo DJ mixer, with black brushed aluminium front panel.

- 6 input channels (4 stereo ways, 2 microphone ways)
- Stereo input channels, switchable 2 x phono/line and 2 x line/line, with LED level display of the stereo master
- Input channels, each with gain control and 3-way equalizer, stereo input channels with cut function
- DJ mic with automatic talkover, PAD switch and on-air switch
- Mic with PAD switch and on-air switch
- Switches illuminate blue when activated



- Adjustable, crossfader-controlled headphone output with pre-fader listening (PFL) to the stereo input channels and mic
- Replaceable crossfader with assignment switches
- Especially easy-sliding high-quality faders
- Master output with stereo LED level display
- Additional outputs booth and zone
- Connection for gooseneck light GNL-204



Model	MPX-44/SW
Mic input	1.5 mV, 2 x 6.3 mm jack
Line input	150 mV, 5 x RCA L/R
CD input	150 mV, 1 x RCA L/R
Phono input	3 mV, 2 x RCA L/R
Master output	1 V/600 Ω, 1 x 3-pole XLR, 1 x RCA L/R
Record output	0.5 V/600 Ω, 1 x RCA L/R
Monitor output	1 V/600 Ω (zone), 1 x RCA L/R
Booth output	1 V/600 Ω, 1 x RCA L/R
Headphones	≥ 8 Ω, 1 x 6.3 mm jack
Gooseneck lamp	12 V/0.75 W, 1 x BNC
Frequency range	20-20,000 Hz
THD	0.1%
S/N ratio	61 dB, unweighted
Equalizer bass	+12 dB, -12 dB/50 Hz (mic) +15 dB, -30 dB/50 Hz (channels 1-4)
Equalizer midrange	+12 dB, -12 dB/1 kHz (mic) +15 dB, -30 dB/1 kHz (channels 1-4)
Equalizer treble	+12 dB, -12 dB/10 kHz (mic) +15 dB, -30 dB/10 kHz (channels 1-4)
Talkover	-16 dB, automatic
Power supply	~ 230 V/50 Hz/20 VA
Dimensions	482 x 177 x 105 mm, 4 RS
Weight	3.6 kg